

Invia® Liberty™

Negative Pressure Wound Therapy



Quick Card **EN**

Enter administrative mode

Switch on

1




1. Press and hold




2. On

2

Acknowledge disclaimer



3




New patient



Same patient


4

Standby Mode



Constant mode

On




Intermittent mode

On



All further instructions will be the same for constant and intermittent mode

Switch off



Off (> 3 sec.)

Basic double key functions

Administrative

Administrative mode



Press and hold



Press

Patient

Change pressure



or
Change pressure

Log file



+
press simultaneously

Change setting



+
press simultaneously

Alarm data



+
press simultaneously



Change Pressure

1

Enter administrative mode




2



change pressure

3



OK


Log file

1

Enter administrative mode





2



press simultaneously

3



Graph mode




1

Enter administrative mode





2



+

press
simultaneously

3



To change setting, choose with



or



"selection buttons"

4


Press



to select

"OK"

5



or

change
setting

6

Press



to confirm

"OK"

7

Press



to exit settings

"Back"

Warning
(Operation continues)

✓

!

⚠

beep

Alarm
(Operation stops)

✗

!!!


⚠

beep beep beep

1

Problem description on the display

Example:

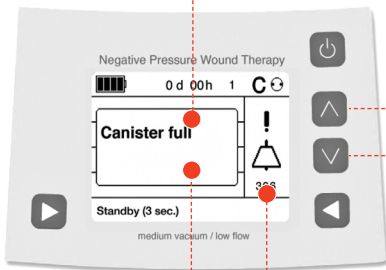

2

⬆

⬇

Acknowledge acoustic alarm

60 Sec. ~~⚠~~

3

Troubleshooting on the display






Fault number

	Fault number	Problem description on the display	Troubleshooting on the display	Remarks/potential cause of fault	Pressure
Alarm	101	Internal clock error	<ul style="list-style-type: none"> • Connect Invia Liberty to PC and start LibertyPro software • Click on "Transfer Info-Data" Button to synchronize the clock 	<ul style="list-style-type: none"> • Time wrong because battery charge is low • Synchronise with software 	
	301	Leak in system	Check system for leaks	<ul style="list-style-type: none"> • Tubing not fixed • Missing or defective seal between the canister and Invia Liberty • Dressing not sealed properly 	✗
	302	System clogged	<ul style="list-style-type: none"> • Check that tubing is clear/not twisted • Check canister filling level 	<ul style="list-style-type: none"> • Tubing is kinked or clogged • Filter in canister contaminated 	✗
	305	Battery empty	Charge battery		✗
	306	Canister full	Change canister	Pressure is maintained if Invia Liberty is in upright position	✓
Warning	401	Battery low	Charge battery	Remaining time of battery approx. 30 min.	✓
	402	USB connection not permitted	Unplug USB cable	USB connection during operation or in patient environment not permitted	✓
	405	Standby mode	Switch on or off	In standby mode after 5 minutes	
Internal fault	XXX	Internal fault	<ul style="list-style-type: none"> • Switch Invia Liberty off and on • Inform Medela Customer Service 	If fault message repeats, report fault number to Medela Customer Service	


✗ Operation stops

✓ Operation continues

1 Clamp patient tubing

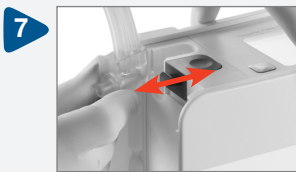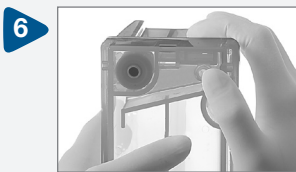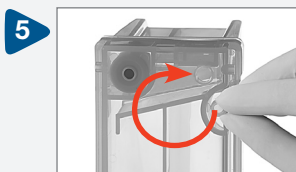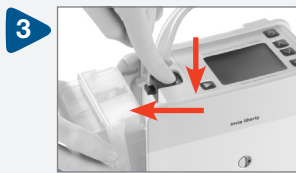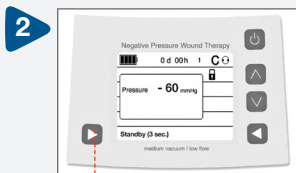

If necessary, replace tubing

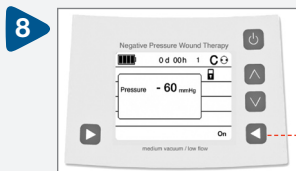

9 Unclamp tubing